




VINSON


Vertical Type Cooler Cabinet

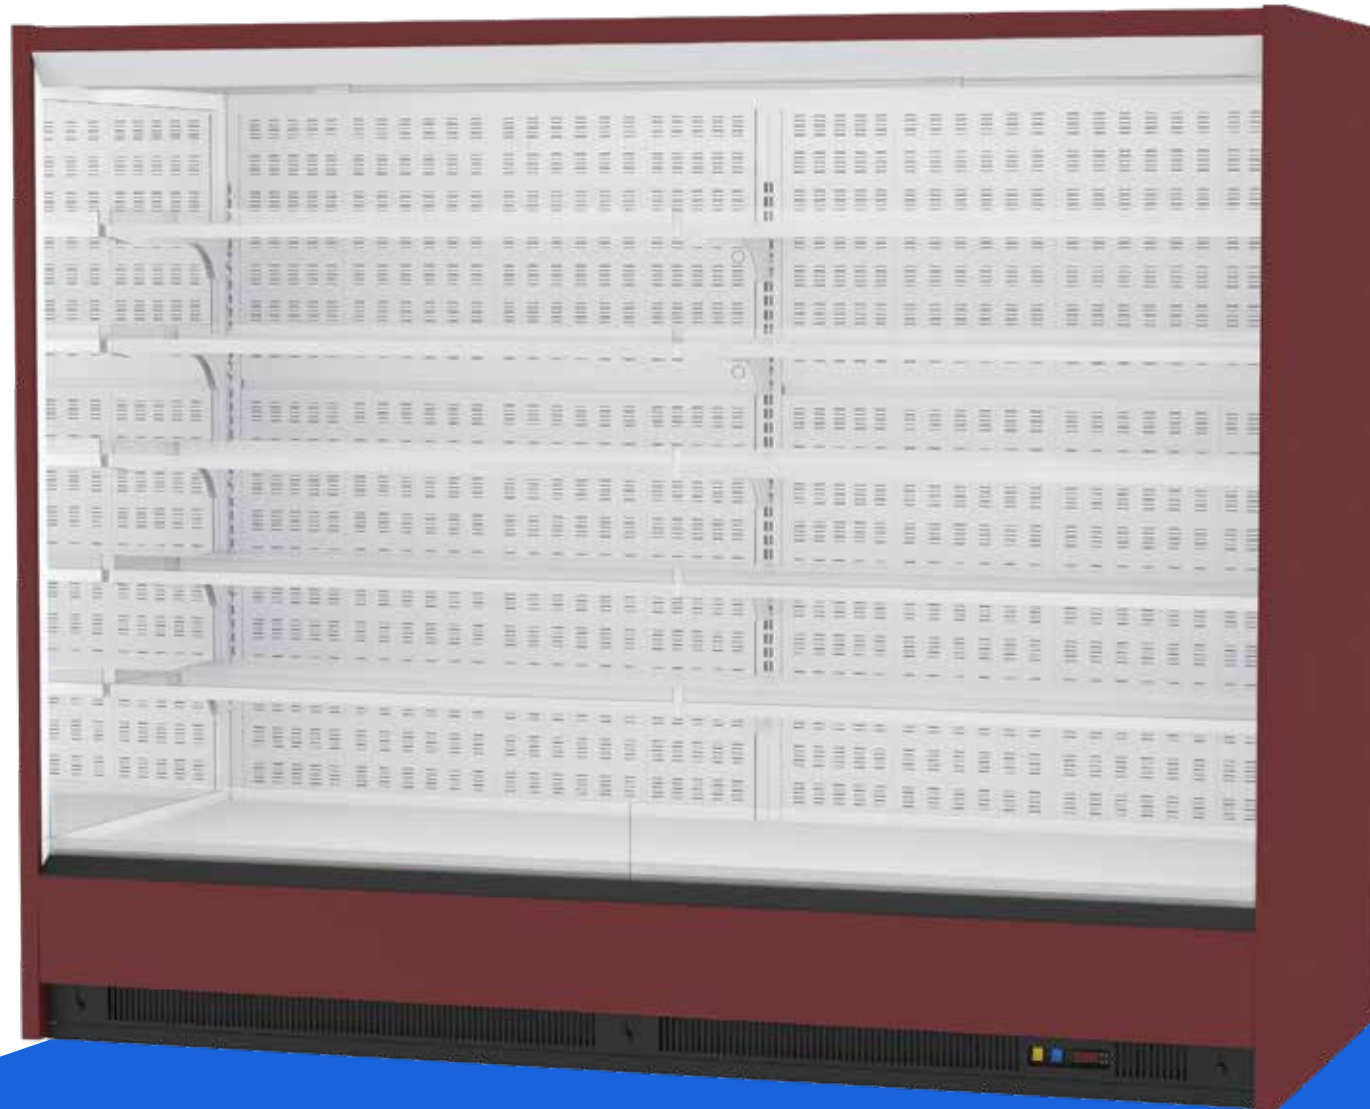


Vertical Type Cooler Cabinet

VINSON


Technical Details




VINSON DP 750/H2200




VINSON DP 750/H2050




VINSON DP 900/H2200




VINSON DP 900/H2050




VINSON DP 1000/H2200




VINSON DP 1000/H2050




VINSON DP 1100/H2200




VINSON DP 1100/H2050

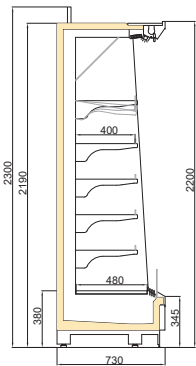


VINSON MT/FV 750/H2200

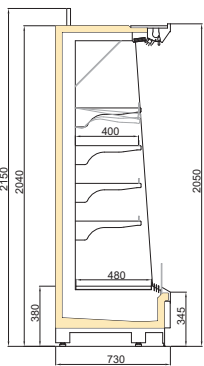


VINSON MT/FV 750/H2050

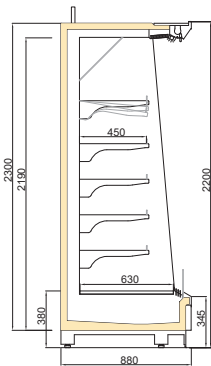


VINSON MT/FV 900/H2200

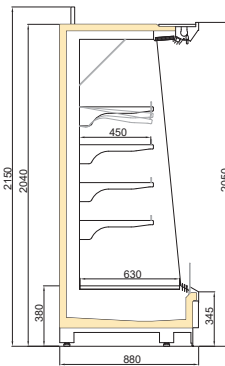


VINSON MT/FV 900/H2050

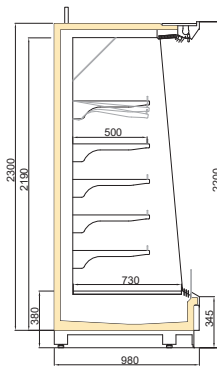


VINSON MT/FV 1000/H2200

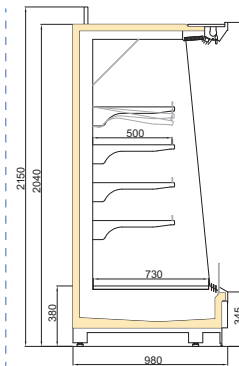

VINSON MT/FV 1000/H2050

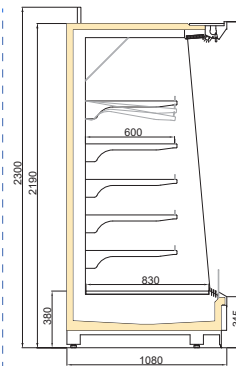

VINSON MT/FV 1100/H2200

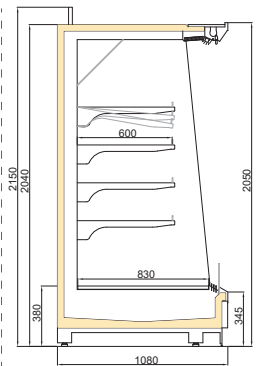

VINSON MT/FV 1100/H2050

DAIRY PRODUCTS

PACKED MEAT & FRUITS VEGETABLES

Available Modules						Operating Temperatures			Ambient Conditions
Length(mm)	1250/49.2	1875/73.8	2500/98.4	3750/147.6	Head	DP	MT	FV	
Side panel (mm)	40/1.57	40/1.57	40/1.57	40/1.57	40/1.57	M2 (-1/+7 °C)	M1 (-1/+5 °C)	H1 (+1/+10 °C)	25°C / 60% RH (EN ISO 23953-2)

