




# TAKAHE BOX VNZ

*Semi Vertical Type Cooler Cabinet*

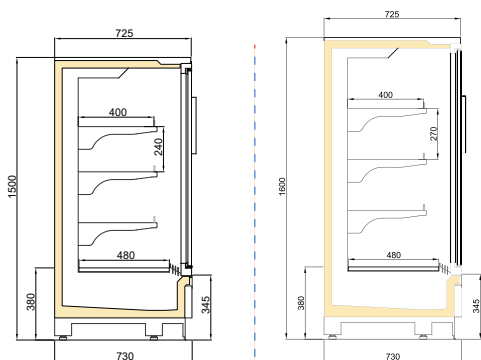

TAKAHE BOX VNZ 750/H1500

TAKAHE BOX VNZ 750/H1600

| Available Modules      |                 |                  |                                   |            |
|------------------------|-----------------|------------------|-----------------------------------|------------|
| Length(mm/in)          | 1250/49.2       | 1875/73.8        | 2500/98.4                         | 3750/147.6 |
| Side panel(mm/in)      | 40/1.57         | 40/1.57          | 40/1.57                           | 40/1.57    |
| Operating Temperatures |                 |                  | Ambient Conditions                |            |
| DP                     | MT              | FV               |                                   |            |
| M2<br>(-1/+7°C)        | M1<br>(-1/+5°C) | H1<br>(+1/+10°C) | 25°C / 60% RH<br>(EN ISO 23953-2) |            |




**VNZ**




# TAKAHE

## Technical Details

### TAKAHE DP

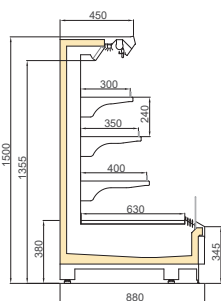


TAKAHE DP 900/H1500

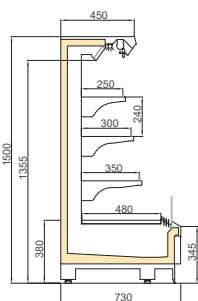


TAKAHE DP 750/H1500

### TAKAHE TLD

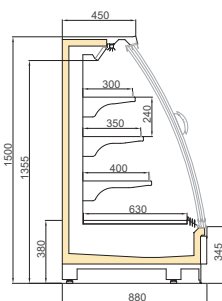


TAKAHE TLD 900/H1500

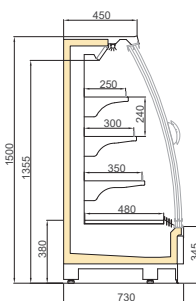


TAKAHE TLD 750/H1500

### TAKAHE DGD/VNZ

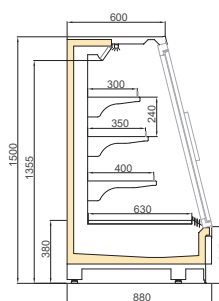


TAKAHE DGD/VNZ 900/H1500

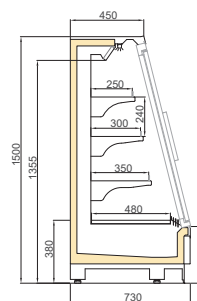


TAKAHE DGD/VNZ 750/H1500


### TAKAHE DGD/SKY

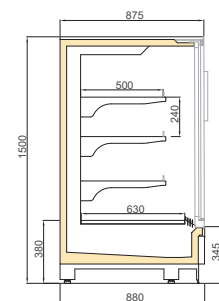


TAKAHE DGD/SKY 900/H1500

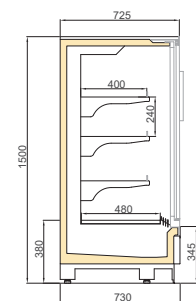


TAKAHE DGD/SKY 750/H1500

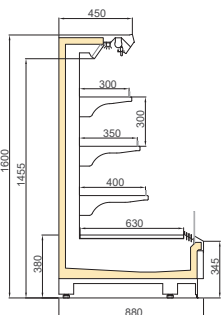


TAKAHE DP 900/H1600

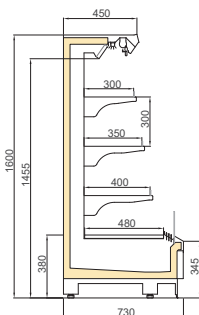


TAKAHE DP 750/H1600

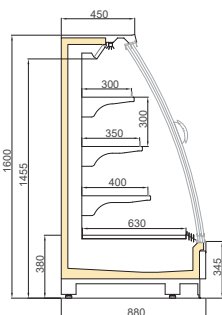


TAKAHE TLD 900/H1600

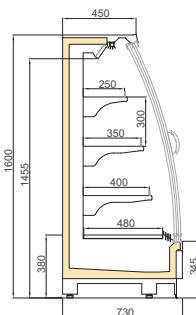


TAKAHE TLD 750/H1600

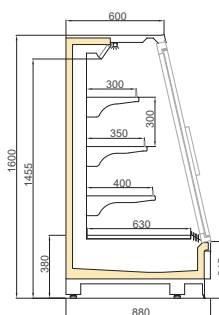


TAKAHE DGD/VNZ 900/H1600

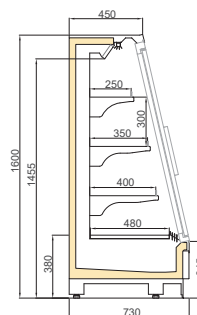

TAKAHE DGD/VNZ 750/H1600

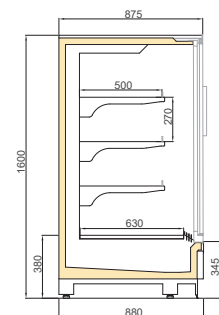

TAKAHE DGD/SKY 900/H1600

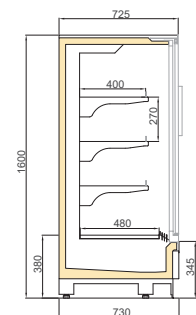

TAKAHE DGD/SKY 750/H1600

| Available Modules  |           |           |           |            |         | Operating Temperatures |                 |                  | Ambient Conditions                |
|--------------------|-----------|-----------|-----------|------------|---------|------------------------|-----------------|------------------|-----------------------------------|
| Length (mm/in)     | 1250/49.2 | 1875/73.8 | 2500/98.4 | 3750/147.6 | Head    | DP                     | MT              | FV               |                                   |
| Side panel (mm/in) | 40/1.57   | 40/1.57   | 40/1.57   | 40/1.57    | 40/1.57 | M2<br>(-1/+7 °C)       | M1<br>(-1/+5°C) | H1<br>(+1/+10°C) |                                   |
|                    |           |           |           |            |         |                        |                 |                  | 25°C / 60% RH<br>(EN ISO 23953-2) |

