




SIDLEY


Refrigerated Serve Over Counter With Flat Glass

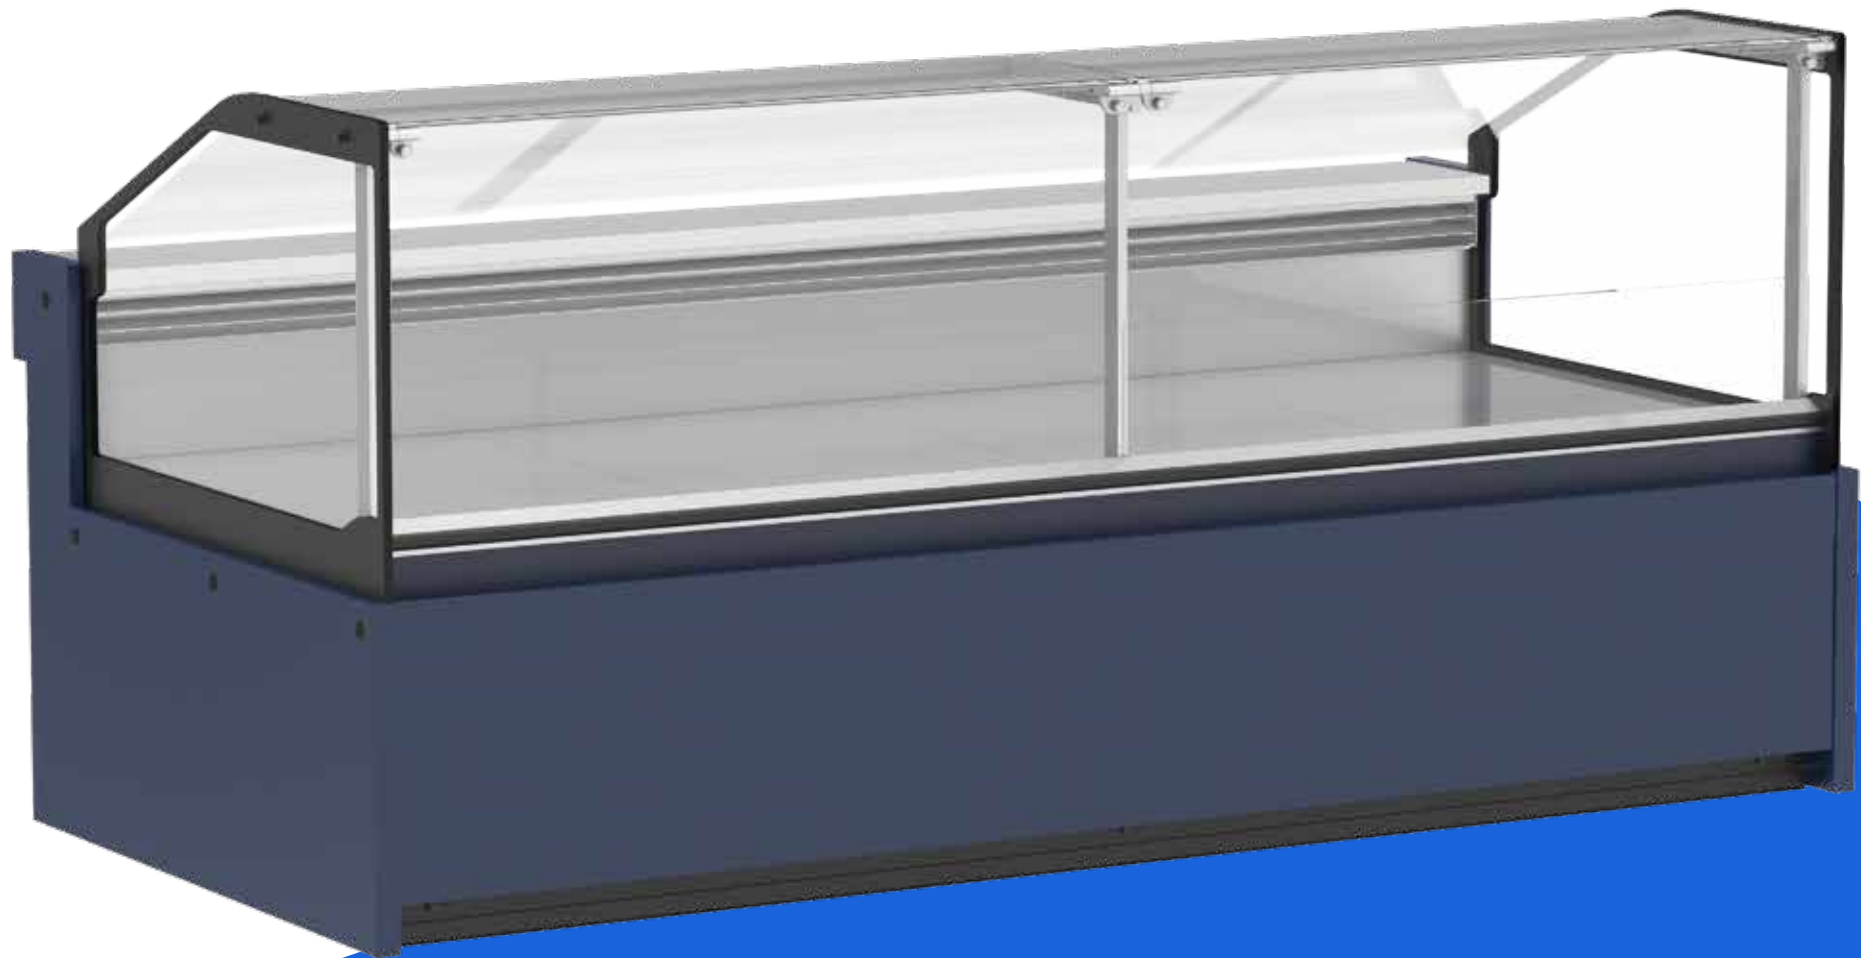


Refrigerated Serve Over Counter

SIDLEY


Technical Details




SIDLEY 900 CG




SIDLEY 800 CG




SIDLEY 700 CG




SIDLEY 900 CG/SS




SIDLEY 800 CG/SS




SIDLEY 700 CG/SS




SIDLEY 900 FG




SIDLEY 800 FG




SIDLEY 700 FG




SIDLEY 900 FG/SS



SIDLEY 800 FG/SS



SIDLEY 700 FG/SS



SIDLEY 800 FG OC 90°

Available Modules					Operating Temperatures	Ambient Conditions	
Length(mm/in)	937/36.8	1250/49.2	1875/73.8	2500/98.4	3750/147.6	M1 (-1/+5 °C) - M2 (-1/+7 °C)	25°C / 60% RH (EN ISO 23953-2)
Side panel (mm/in)	40/1.57	40/1.57	40/1.57	40/1.57	40/1.57		

